

IP CABLING TRANSMISSION – POE Repeater

ITEM NO.: IP04



IP04 is a POE repeater to extend power and data an additional 100meters. Multiple units are allowed for longer distance, eliminating the need for additional switches, hubs and expensive fiber installations. It compliant with standard POE IEEE802.3af.


IP04 POE Repeater

- Extend of both power and data beyond 100 meters.
- Allow to use multiple repeaters for longer range.
- No external power required.
- Compatible IEEE 802.3af POE standard.
- Auto-sensing for detecting PoE or non-PoE devices.
- Support 10/100/1000 BASE-T transmission rate.
- Built in LED status indication.
- Plug and play for easy installation.


Installation View:

IP04 itself provide data and power 120 meters , the power will drop as below by multiple POE repeaters and long cable length application:

Max Device Power Range with PoE switch	1 st IP04 Max.	2 nd IP04 Max.
	8.58W at 240M	4.21W at 360M

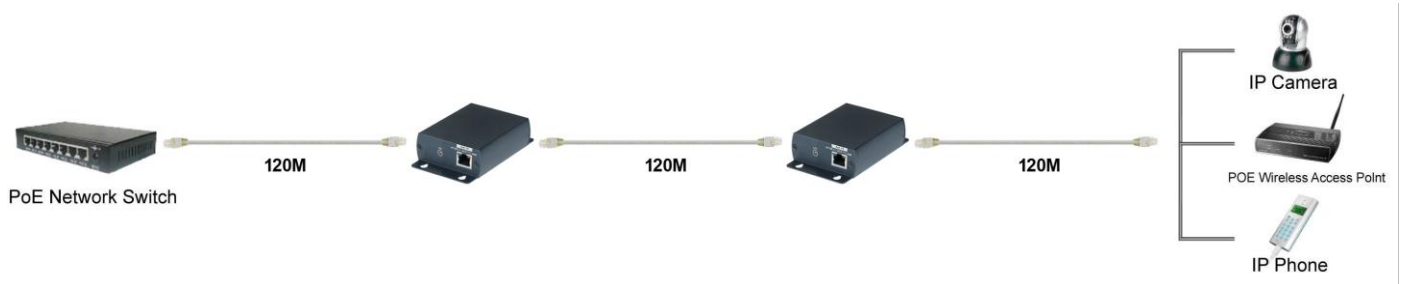

Panel View:

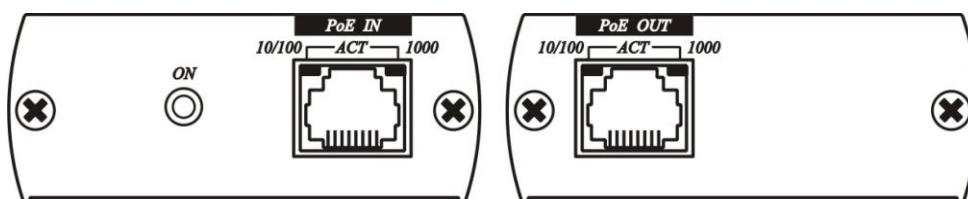

Linking Cable :

Use CAT.5e UTP/STP or CAT.6 UTP cable

LED Indication :

LED (Green)	ON	PSE send power
	OFF	PSE non-power
RJ45 (Yellow)	ON	1000 Mbps link
	OFF	1000 Mbps unlink
	FLASH	Activity
RJ45 (Green)	ON	10/100 Mbps link
	OFF	10/100 Mbps unlink
	FLASH	Activity

Option Model:

IP05I : POE injector IEEE 802.3af POE standard.

IP05H: 5 Port POE Switch IEEE 802.3af POE standard.

Specification:

ITEM NO.	IP04
Power & Data Input/Output	RJ45
Data Link	Pin 1/2 , 3/6 , 4/5 , 7/8
Power Link	Pin 1/2 (+) , 3/6 (-) End-Span
Transmission Range	2 pieces repeater up to 360 Meters
LED Indication	Power: Green, Data link: Yellow/Green
POE	IEEE 802.3af Standard, 48V · 12.95W
Power Consumption	Non-load 1.1W (23mA) , 1.44W (30mA) @ 10Mbps , 1.92W (40mA) @ 100/1000Mbps
Temperature	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%
Dimensions mm	67×110×27 mm
Weight g	180g

RoHS   

Rev.C