

# FORESIGHT CCTV INC.

10 Leavey Court, North York, On. Canada M2H1E6 Tell: 416-512-6288 Toll: 1-888-GO2-CCTV Fax: 416-225-2889

## Serial Data Distributor in 19" 1U Rack Mounting

## ITEM NO.: RS008, RS016

RS008, RS016 both are serial data distributor, gives serial data back on 8/16 outputs at the same time, allowing perfect configurations. The transmission in RS485 and takes places at the same time on all 8/16 outputs. The receiving mode of the input can be selected in RS485 or RS232.

### RS008 Serial Data Distributor 1 In 8 Out In 1U Rack Mounting Panel

- Input option: 1 x RS232, 2 x RS485 (3 input can be "stand by" status at the same time, but only one controller will be
  activated at once)
- Output: 8 x RS485.
- 8 RS485 serial outputs the data sending back from the input.
- Max. connection range up to 1200 meters by Twisted Pair cable.
- Ability to cascade connection to other units RS008/RS016.
- The application gives serial data back on 8 outputs at the same time, to provide perfect configurations.
- Power supply included.




## RS016 Serial Data Distributor 1 In 16 Out In 1U Rack Mounting Panel

- Input option: 1 x RS232, 2 x RS485 (3 input can be "stand by" status at the same time, but only one controller will be
  activated at once)
- Output: 16 x RS485.
- 16 RS485 serial outputs the data sending back from the input.
- Max. connection range up to 1200 meters by UTP cable.
- Ability to cascade connection to other units RS008/RS016.
- The application gives serial data back on 16 outputs at the same time, to provide perfect configurations.
- Power supply included.



### Installation View:

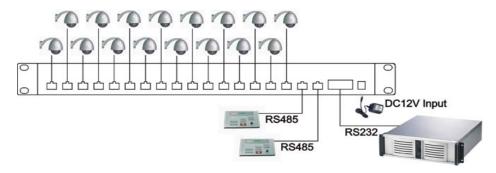

Specification:

ITEM NO.	RS008	RS016
DATA Input	RS232 / RS485 (Terminal Block)	
Data Input Selection	SW	
Data Output Port	8 Port (Terminal Block)	16 Port (Terminal Block)
Data Output Signal	RS485	
Power Supply	12 VDC	
Power Consumption	350mA	
Operating Temperature	0 ~45°C	
Dimension W x H x D mm	482x100X44 (1U)	
Weight g	1050	1100
Material	Metal Black	

#### RELATED PRODUCTS:

RS001: RS232 TO RS485 CONVERTER.

PCR011: PTZ Telemetry Receiver Built in PELCO D protocol, indoor type.

PCR017: PTZ Telemetry Receiver Built in PELCO D protocol, IP65 housing outdoor type. PCT017: PTZ Transmitter/Controller for PCR011/PCR017, Built in PELCO D protocol.

http://www.foresight-cctv.com

-